





## NE360C

mPOS Payment Device Cradles  
& Counter Dock

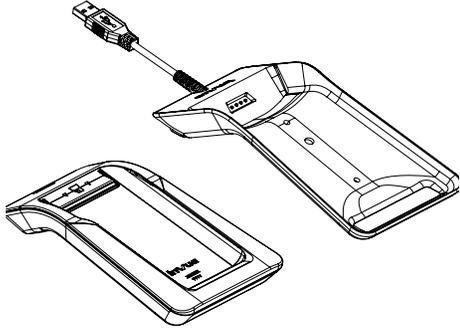


**Note:** The cradle and device shown in these instructions may differ slightly to your items, but they will install the same way.

- 1** Use the provided alcohol wipe and clean the feet on the bottom. Allow it to dry completely.

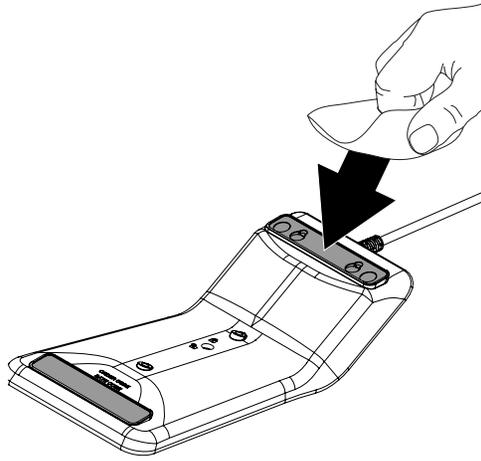


- 2** If mounting to a wall drill 2 holes  $1 \frac{7}{16}$  inches (36.5 mm) apart. Use appropriate hardware for the mounting material (not supplied).

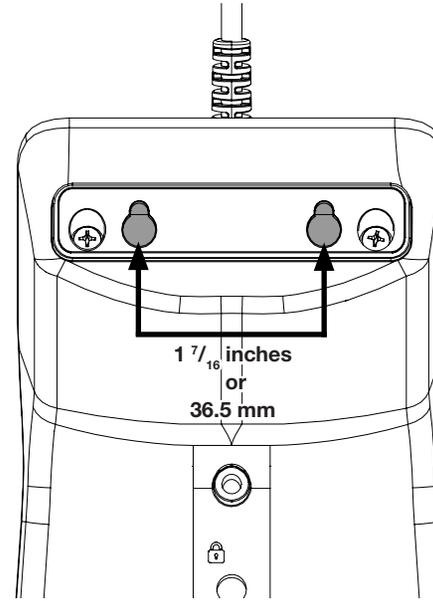


- 3** Select the feet that are appropriate for your installation:
- Adhesives (shiny) for a permanent solution
  - Non-Slip Pads (dull) for a repositionable solution or when screw mounting.


Remove the feet from their backing and place them into the depressions on the dock. Apply pressure for at least 10 seconds.

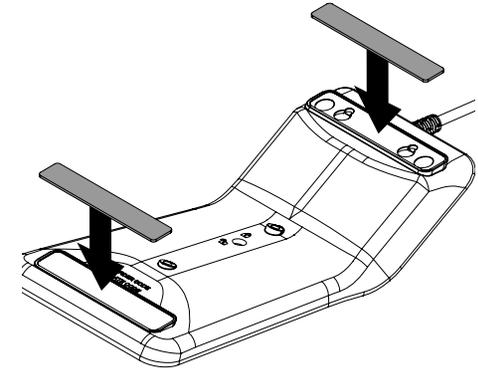


- 4** Place the payment device cradle into the dock.

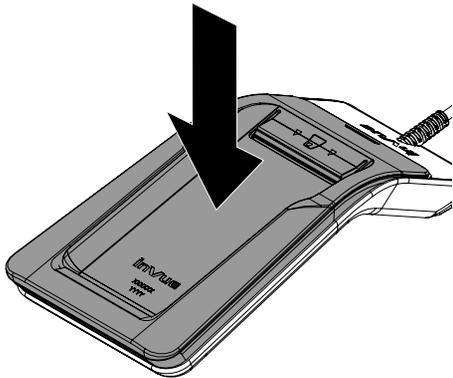


- 5 Optional:**  
Use the 2 provided screws to secure the cradle to the dock.

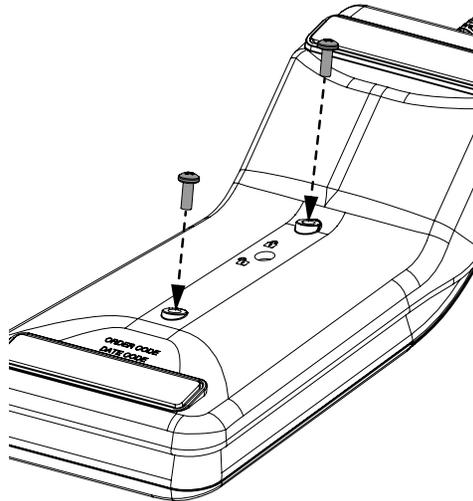


- 6** If the adhesives were installed, peel the clear film from the adhesives

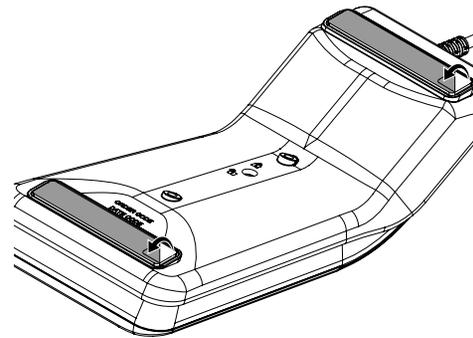


- 7** Place the dock where desired, facing the customer's position. If the adhesives were used, press against the surface for at least 10 seconds.

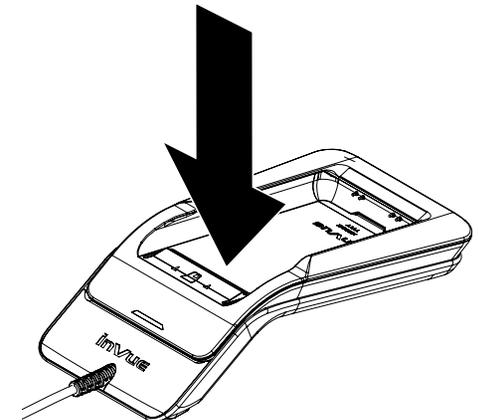


- 8 If your cradle comes with a back cover, secure the cover to the back of the payment device using the screws provided. Some covers will just snap on.

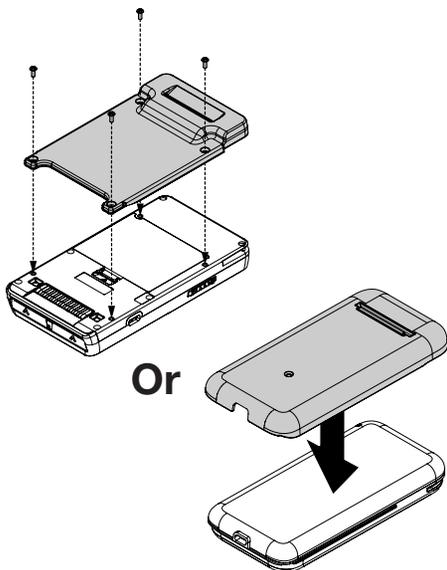


- 9 Slide the payment device into the cradle. The device will click into place when properly inserted.

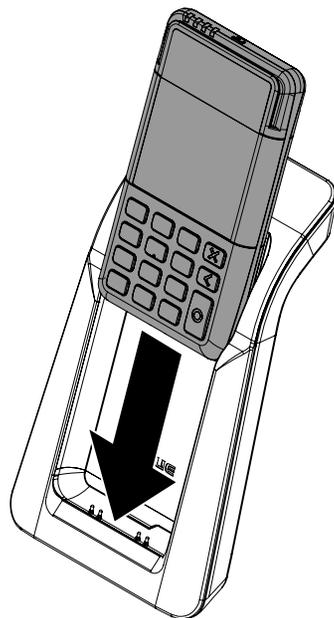


- 10 **Optional:** To inhibit the removal of the payment device from the cradle, use a flat head screwdriver to turn the lock indicator towards the lock icon.

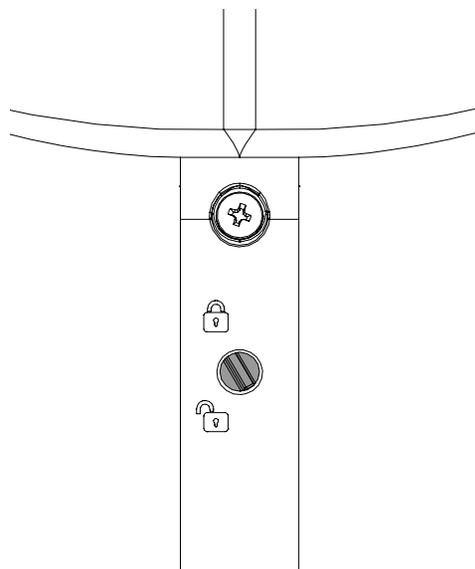


- 11 Plug the dock cable into into the USB-A port on a computer or other device running the POS software. **Note:** If the payment device application communicates wirelessly, plug the dock cable into a standard USB-A 5V Power supply.

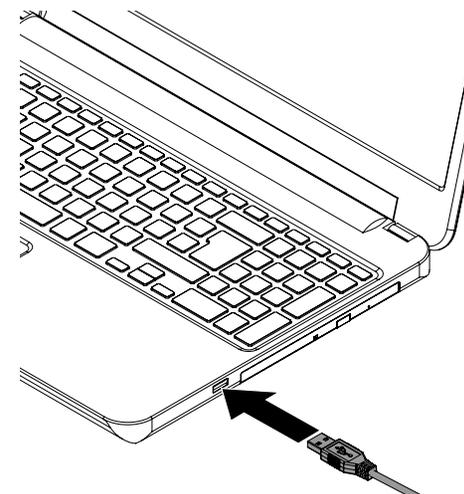

- 12 Place the payment center cradle onto the counter dock. The LED on the cradle will illuminate white.

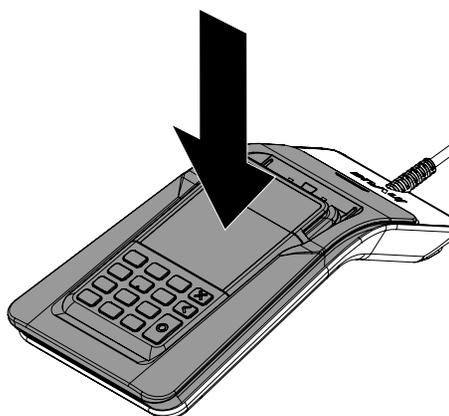

- 13 To remove the payment device from the cradle, press down on the hinge feature and push the payment device out of the cradle. **Note:** If the payment device was locked into the cradle (see step 10), ensure that the payment device is unlocked.

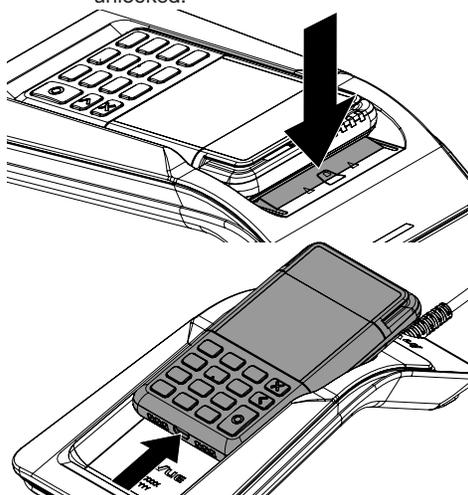

#### FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### ISED Regulatory Compliance

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
  - (2) This device must accept any interference, including interference that may cause undesired operation of the device.
- This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé.



**Cleaning Note:**

When cleaning or disinfecting any part of the unit, prevent any cleaning solution from being applied directly to the electrical contacts.



SD0724 Rev0 02/11/21

**inVUE**

[www.invue.com](http://www.invue.com)

**NA / LATAM** // 704.752.6513 • 888.55.INVUE

**EMEA** // +31.23.8900150

**APAC** // +852.3127.6811